

# SELECTION THE ESSENTIALS



**bolle**   
SAFETY

SEE ALL  
YOU CAN DO

# WHO WE ARE ?

CREATED MORE THAN 130 YEARS AGO IN FRANCE,  
BOLLÉ SAFETY IS THE GLOBAL PPE EYEWEAR SPECIALIST.



Established in **1888**  
by the Bollé family in France.

Part of the **Bollé Brands group.**

B O L L É B R A N D S™



SERENGETI™



**Bollé Safety** global brand  
dedicated to PPE eyewear.  
#1 in France, the United Kingdom  
and Australia.

## OUR STRENGTHS



**PPE eyewear specialist**  
in different work environments.

- Industrial
- Tactical & first responders
- Healthcare
- Cleanroom
- Blue Light



An ambition to work towards a brighter future :  
**Go Green sustainability plan** (focus  
on eco-conception).



**Innovative company :**  
lens coatings and technologies  
(Platinum, CSP, ProBlu, ...).



Optical expertise with **a strong global  
prescription programme.**  
Simple & Automatized process. EN166 -certified  
range of prescription glasses.



**05****GLASSES****14****WELDING****10****HYBRIDS****15****CLEANROOM****11****OTG****12****GOGGLES****19****BLUE  
LIGHT****20****B-LINE****21****ACCESSORIES  
& B-CLEAN****22****MARKINGS  
& STANDARDS**

# PLATINUM

THE ULTIMATE PROTECTION AGAINST FOG & SCRATCH



# 100X MORE EFFECTIVE THAN THE HIGHEST ANTI-FOG STANDARD\*

*\*Tested by an independent laboratory, using the EN166 protocol, on a representative sample of NESS+ products.*

**TOP SELLER**

## RUSH+

- + Bi-material, flexible coloured temples
- + Adjustable non-slip bridge
- + Upper protection



**26 g**

FRAME: EN166 FT CE

Other versions: Small, Hybrid

| VERSION | SKU       | LENS MARKING       |
|---------|-----------|--------------------|
| Clear   | RUSHPPSI  | 2C-1.2  1 FT KN CE |
| Clear   | RUSHPPSIB | 2C-1.2  1 FT KN CE |
| Clear   | RUSHPPSIG | 2C-1.2  1 FT KN CE |
| Clear   | RUSHPPSIO | 2C-1.2  1 FT KN CE |
| Copper  | RUSHPCSP  | 5-1.4  1 FT KN CE  |
| Bronze  | RUSHPTWI  | 5-2  1 FT KN CE    |
| Smoke   | RUSHPPSF  | 5-3.1  1 FT KN CE  |



# OUR PLATINUM SAFETY GLASSES

## Available with:

|                                                                                             |                                                                                                 |                                                                                                 |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
|  CSP LENSES |  CUSTOMIZATION |  ECO-PACKAGING |
|  PLATINUM   |  PLATINUM LITE |  PRESCRIPTION  |

## ERGONOMIC

### NESS+

Autres versions: Small



30 g

FRAME:  EN166 FT CE

- + Ultra wrap-around frame for perfect protection
- + Non-slip bridge
- + Bi-material temples for better comfort

| VERSION                                                                                    | SKU                                                                                          | LENS MARKING                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Clear  |  NESSPPSI | 2C-1.2  1 FT KN CE  |
|  Copper |  NESSPCSP | 5-1.4  1 FT KN CE   |
|  Smoke  |  NESSPPSF | 5-3.1  1 FT KN CE   |

## COMFORT

### SILIUM+



21 g

FRAME:  EN166 FT CE

- + Lightweight frame
- + All-round vision
- + Thin temples that adapt perfectly to other PPE equipment (e.g. ear defenders)

| VERSION                                                                                    | SKU                                                                                         | LENS MARKING                                                                                                                                                                              |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Clear  |  SILPPSI | 2C-1.2  1 FT KN CE  |
|  Copper |  SILPCSP | 5-1.4  1 FT KN CE   |
|  Smoke  |  SILPPSF | 5-3.1  1 FT KN CE   |

## VERSATILITY

### COBRA

Other version : Hybrid



28 g

FRAME:  EN166 FT CE

- + 1 product = 2 uses (spectacles or goggles version)
- + Wide range of lens shades for multiple applications
- + Pivoting temples to adjust and improve protection

| VERSION                                                                                           | SKU                                                                                         | LENS MARKING                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Clear           |  COBPSI  | 2C-1.2  1 BT KN CE  |
|  HD              |  COBHDI  | 2C-1.2  1 BT CE AS/AF                                                                                  |
|  Copper          |  COBCSP  | 5-1.4  1 BT KN CE   |
|  Gradient Bronze |  COBCONT | 5-1.1/1.4  1 BT KN CE AS/AF                                                                            |
|  Smoke           |  COBPSF  | 5-3.1  1 BT KN CE   |

## OUTDOOR

### MERCURO



32 g

FRAME:  EN166 FT CE

- + Wide field of vision
- + No metal part
- + Optional strap for more support

| VERSION                                                                                       | SKU                                                                                          | LENS MARKING                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Copper    |  MERCSP | 5-1.4  1 FT KN CE  |
|  Smoke     |  MERPSF | 5-3.1  1 FT KN CE  |
|  Polarized |  MERPOL | 5-3.1  1 FT CE AS                                                                                       |

## LIGHTNESS

### CONTOUR



21 g

FRAME:  EN166 FT CE

- + Ultra-lightweight
- + Non-slip bridge
- + Thin TIPGRIP temples for better support

| VERSION                                                                                          | SKU                                                                                               | LENS MARKING                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Clear        |  CONTPSI     | 2C-1.2  1 FT KN CE  |
|  Copper       |  PSSCONT-C10 | 2C-1.2  1 FT KN CE  |
|  Copper Flash |  CONTESP     | 2C-1.2  1 FT KN CE AS/AF                                                                                 |
|  Smoke        |  CONTPSF     | 2C-1.2  1 FT KN CE  |
|  Polarized    |  CONTPOL     | 5-1.4  1 FT KN CE AS                                                                                     |

# OUR PLATINUM LITE SAFETY GLASSES

## Disponible avec:

CSP CSP LENS



CUSTOMIZATION



ECO-PACKAGING

PL PLATINUM



PLATINUM LITE



PRESCRIPTION

## METAL SILIUM



CSP PL

34 g

FRAME: EN166 FT CE

- Increased upper protection
- Adjustable non-slip bridge
- FLEX 160° temples to adapt to all heads and reduce pressure points

| VERSION | SKU    | LENS MARKING   |    |
|---------|--------|----------------|----|
| Clear   | SILPSI | 2C-1.2 1 FT CE | PL |
| Smoke   | SILPSF | 5-3.1 1 FT CE  | PL |

## ECONOMICAL BL30



CSP PL

24 g

FRAME: EN166 FT CE

- Scratch and fogging protection
- «Stop-in» system (holds the temples to prevent contact with the lenses)
- Lightweight and contains no metal parts

| VERSION | SKU         | LENS MARKING   |    |
|---------|-------------|----------------|----|
| Clear   | PSSBL30-014 | 2C-1.2 1 FT CE | PL |
| Smoke   | PSSBL30-408 | 5-2.5 1 FT CE  | PL |

## OUTDOOR KOMET



CSP PL

31 g

FRAME: EN166 FT CE UK

- Ergonomical flat temples
- Engineered with sustainable hot runner moulding
- No metal parts

| VERSION    | SKU        | LENS MARKING  |    |
|------------|------------|---------------|----|
| Smoke      | PSSKOME408 | 5-3.1 1 FT CE | PL |
| Polarized  | PSSKOME01  | 5-3.1 1 FT CE | PL |
| Fire Flash | PSSKOME06  | 5-3.1 1 FT CE | PL |

## ADAPTIVE NESS



CSP PL

28 g

FRAME: EN166 FT CE

- Ultra wrap-around frame for perfect protection
- Non-slip bridge
- Thin temples that adapt perfectly to other PPE equipment (e.g. ear defenders)

| VERSION | SKU     | LENS MARKING   |    |
|---------|---------|----------------|----|
| Clear   | NESSPSI | 2C-1.2 1 FT CE | PL |
| Smoke   | NESSPSF | 5-3.1 1 FT CE  | PL |

## COMFORT SILEX



CSP PL



30 g

FRAME: EN166 FT CE

- FLEX 160° temples to adapt to all heads and reduce pressure points
- No metal parts
- Sporty design

| VERSION | SKU      | LENS MARKING      |    |
|---------|----------|-------------------|----|
| Clear   | SILEXPSI | 2C-1.2 1 BT KN CE | PL |
| Amber   | SILEXPSJ | 2C-1.2 1 BT KN CE | PL |
| Smoke   | SILEXPSF | 5-3.1 1 FT CE     | PL |






COMFORT. SENSE. PERCEPTION.

# THE BEST LENS -FILTERING TECHNOLOGY


INDOOR




WELDING

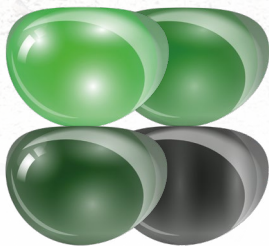


INDOOR/OUTDOOR

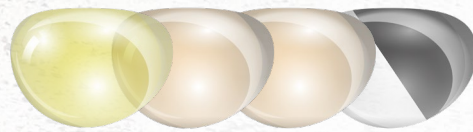

OUTDOOR

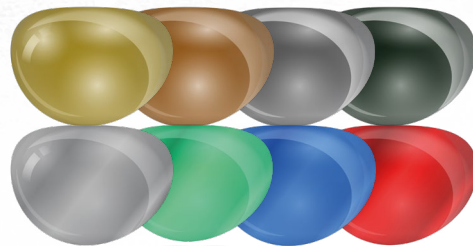

TO  
LEARN  
MORE





# WHAT GO GREEN MEANS TO US

Since the launch of our **GO GREEN** program, our eco-friendly projects have thrived for the greater benefit of our clients and the planet. We have always endeavored to choose the most environmentally friendly policies whenever possible to reduce our carbon footprint.



## OUR GOALS

**100 %** and **50 %** of  
of our innovations and our flagship products  
with an eco-friendly version by 2025.

**-35 %**  
emissions per  
product by 2027  
(VS 2021)

### OUR ECO-DESIGNED PRODUCTS



NYLON FRAME MADE OF  
**RECYCLED**  
FISHING NET



**SOLIS**  
**GO GREEN**



25 g

FRAME: ☞ EN166 F CE

- + 100% recycled nylon frame made from fishing nets
- + Recycled & still 100% compliant to international safety standards
- + Full frame for more coverage & protection

| VERSION | SKU          | LENS MARKING    |   |
|---------|--------------|-----------------|---|
| ☉ Clear | ■ PSSSOLI063 | 2C-1.2 ☞ 1 F CE | ☞ |
| ☉ Smoke | ■ PSSSOLI441 | 5-3.1 ☞ 1 F CE  | ☞ |



70% OF TOTAL PRODUCT WEIGHT IN  
**RECYCLED MATERIAL**



**HUSTLER**  
**GO GREEN**



45 g

FRAME: ☞ EN166 FT CE

- + Flexible and wrap-around frame
- + Non-slip bridge
- + TIPGRIP non-slip temples

| VERSION | SKU         | LENS MARKING     |   |
|---------|-------------|------------------|---|
| ☉ Clear | ■ HUSTLN10E | 2C-1.2 ☞ 1 FT CE | ☞ |
| ☉ Smoke | ■ HUSTLN20E | 5-3.1 ☞ 1 FT CE  | ☞ |

# ECO- PACKAGING



This pictogram indicates products available in eco-packaging



0%  
OF PLASTIC



30%  
LESS  
WASTE



100%  
RECYCLABLE  
PACKAGING



VEGETAL  
BASED  
INK

AVAILABLE WITH



**BL30**



**COBRA**



**NESS+**



**RUSH+**



**SILEX**



**SILEX+**



**SOLIS**



**SUPERBLAST**



**ULTIM8**

# ECO- POLYBAG



Since January 2023,  
Bollé Safety has been  
manufacturing all  
its products with this  
100% recycled packaging.\*

\*B-Line 50% recycled.

ECO-POLYBAG :  
A SINGLE-UNIT PLASTIC  
PACKAGING MADE  
WITH RECYCLABLE  
POLYETHYLENE.

# OUR HYBRID SAFETY GLASSES

## ERGONOMIC

### NESS+

Other versions : Regular & Small



48 g

FRAME: EN166 3 4 FT CE

- + Ultra wrap-around frame for perfect protection
- + Non-slip bridge
- + Bi-material temples for better comfort

| VERSION | SKU        | LENS MARKING        |
|---------|------------|---------------------|
| Clear   | PSSNESF028 | 2C-1.2 1 FT KN CE P |

## SEALED

### ULTIM8



64 g

FRAME: Without strap: EN166 FT CE  
/ With strap: EN166 3 4 5 BT CE

- + Sealed bi-material frame
- + Assembled with a spectacles/goggles conversion kit: increases impact resistance (type B: 120m/s)
- + Removable and adjustable strap

| VERSION | SKU     | LENS MARKING        |
|---------|---------|---------------------|
| Clear   | ULTIPSI | 2C-1.2 1 BT KN CE P |

## VERSATILITY

### COBRA



53 g

FRAME: EN166 3 BT CE UK  
TPR Version: EN166 3 4 5 BT CE UK

- + 1 product = 2 uses (spectacles or goggles version)
- + Wide range of lens shades for multiple applications
- + Pivoting temples to adjust and improve protection

| VERSION              | SKU       | LENS MARKING        |
|----------------------|-----------|---------------------|
| Clear Foam/Temples   | COBFTPSI  | 2C-1.2 1 BT KN CE P |
| Clear Foam/Strap     | COBFSPSI  | 2C-1.2 1 BT KN CE P |
| Clear Foam/TPR Strap | COBTPRPSI | 2C-1.2 1 BT KN CE P |

## COVERING

### TRACKER



52 g

FRAME: Without strap: EN 166 FT CE  
/ With strap: EN 166 3 4 BT CE

- + Vented frame
- + High impact resistance (type B: 120m/s)
- + Upper protection

| VERSION | SKU     | LENS MARKING        |
|---------|---------|---------------------|
| Clear   | TRACPSI | 2C-1.2 1 BT KN CE P |
| Copper  | TRACPSJ | 5-1.4 1 BT KN CE P  |
| Smoke   | TRACPSF | 5-2.5 1 BT KN CE P  |



# SAFETY OTG

## ECONOMICAL SQUALE



47g

FRAME: EN166 FT CE

- + Adjustable temples
- + Side shields
- + Wide frameless model

| VERSION | SKU    | LENS MARKING   |
|---------|--------|----------------|
| Clear   | SQUPSI | 2C-1.2 1 FT CE |

## ERGONOMIC IFS20



274 g

FRAME: EN166 3 B CE

- + XL flip-up face shield: 24 cm x 32 cm
- + Adjustable headband: 57-64 cm
- + Spare lens available

| VERSION | SKU        | LENS MARKING  |
|---------|------------|---------------|
| Clear   | PFSIFS2109 | 2C-1.2 1 B CE |

## PREMIUM TRYON OTG



41 g

FRAME: EN166 FT CE

- + Bi-material, adjustable and stretchable temples
- + Flexible front protection
- + Curved tips inside each temple providing comfort, stability and perfect support on the face

| VERSION | SKU       | LENS MARKING      |
|---------|-----------|-------------------|
| Clear   | TRYOTGPSI | 2C-1.2 1 FT KN CE |
| Smoke   | TRYOTGPSF | 5-3.1 1 FT KN CE  |

## PROTECTION SPHERE



355 g

FRAME: EN166 3 8 9 AT CE

- + Protection against electrical short circuit arcs
- + 20.5 x 39.4 cm PC shield
- + Resistant to high energy impact (A marking)

| VERSION | SKU     | LENS MARKING       |
|---------|---------|--------------------|
| Clear   | SPHERPI | 2C-1.2 1 8 9 AT CE |

# UNIVERSAL

## RISE TO THE CHALLENGE

### WAVE TECHNOLOGY

ADAPTABLE FIT

### COLOR CODE

SIMPLIFIED SELECTION

### PLATINUM COATING

ANTI-FOG &amp; ANTI-SCRATCH



### PREMIUM

## UNIVERSAL

Other version : Welding

- + Wide field of vision: 150°
- + PC/TPR co-injected frame with overflow chute
- + Easy-fix pivoting faceguard



109 g

FRAME: EN166 3 4 5 9 BT CE UK / EN166 3 4 9 BT CE UK

| VERSION                   | SKU       | LENS MARKING        |  |
|---------------------------|-----------|---------------------|--|
| Clear - Vented            | UNIVGN10W | 2C-1.2  19 BT KN CE |  |
| Clear - Sealed            | UNIVGN11W | 2C-1.2  19 BT KN CE |  |
| Clear - Sealed - Neoprene | UNIVGN13W | 2C-1.2  19 BT KN CE |  |
| Faceguard                 | UNIVGN00W |                     |  |

**VERSATILITY****SPECTRUM**AVAILABLE **Q1 2024**

- + Co-injected PC/TPR frame for optimum comfort
- + Multiple sizes and coatings available
- + Soft gasket to fit most face structures

CSP P R

105 g

FRAME: 16321  UL1,2 GL3 DT 1-M 3 6 4 CE  / 16321  UL1,2 GL3 DT 1-M 3 6 4 5 CE 

| VERSION                                                                                                 | SKU                                                                                           | LENS MARKING                                                                                            |                                                                                       |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  Clear - Vented        |  SPECTN10W   |  UL 1,2 DT 1 KN CE   |    |
|  Clear - Sealed        |  SPECTN11W   |  UL 1,2 DT 1 KN CE   |    |
|  Clear - Vented       |  SPECTN12W  |  UL 1,2 DT 1 CE     |   |
|  Clear - Sealed      |  SPECTN13W |  UL 1,2 DT 1 CE    |  |
|  Clear - Vented-Foam |  SPECTN14W |  UL 1,2 DT 1 KN CE |  |
|  Clear - Sealed-Foam |  SPECTN15W |  UL 1,2 DT 1 KN CE |  |
|  Smoke - Vented      |  SPECTN20W | UNDER CERTIFICATION                                                                                     |  |

**ECONOMICAL****GLOBE**

- + Light translucent and flexible frame
- + Panoramic vision
- + Wide adjustable strap

R

113 g

FRAME:  EN166 3 4 9 BT CE 

| VERSION                                                                                            | SKU                                                                                           | LENS MARKING                                                                                           |                                                                                       |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  Clear - Vented |  GLOBEN10W | 2C-1.2  1 BT 9 CE |  |
|  Clear - Sealed |  GLOBEN11W | 2C-1.2  1 BT 9 CE |  |



# OUR SAFETY WELDING PRODUCTS



## WELDING HELMET FUSION+



OPTICAL CLASS: 1/1/1/2

525 g

- + 100 x 53 mm field of vision
- + Ergonomic shape-memory headband
- + Low battery signal & Changeable battery

| VERSION                | SKU    | MARQUAGE |
|------------------------|--------|----------|
| Cagoule                | ■ FUSV | 5-8/9-13 |
| Electro-optical filter | B7VP   | 5-8/9-13 |

## GOGGLE

## UNIVERSAL



111 g

FRAME: EN166 3 4 9 BT CE UK EN175 9 B CE UK

- + Optimal fit thanks to its Wave technology
- + PC/TPR co-injected frame with overflow chute
- + Easy-fix pivoting faceguard

| VERSION               | SKU         | LENS MARKING  |
|-----------------------|-------------|---------------|
| Welding 5 grey-Vented | ■ UNIVGN80W | 5 19 BT KN CE |
| Faceguard             | ■ UNIVGN00W |               |

## HYBRID

## TRACKER



52 g

FRAME: EN166 3 F CE

- + Vented frame
- + High impact resistance (type B: 120m/s)
- + Upper protection

| VERSION     | SKU         | LENS MARKING   |
|-------------|-------------|----------------|
| Welding 1.7 | ■ TRACWPCC2 | 1.7 1 FT CE AS |
| Welding 3   | ■ TRACWPCC3 | 3 1 FT CE AS   |
| Welding 5   | ■ TRACWPCC5 | 5 1 FT CE AS   |

## GLASSES

## SLAM



24 g

CSP

FRAME: EN166 FT CE

- + Ultra wrap-around fit
- + All-round field of vision
- + Comfortable straight temples

| VERSION     | SKU        | LENS MARKING   |
|-------------|------------|----------------|
| Welding 1.7 | ■ SLAWPCC2 | 1.7 1 FT CE AS |
| Welding 3   | ■ SLAWPCC3 | 3 1 FT CE AS   |
| Welding 5   | ■ SLAWPCC5 | 5 1 FT CE AS   |

# CLEANROOM

## PANORAMIC VISION

### ELITE

- + Extra wide panoramic view
- + Adjustable cleanroom strap
- + Fits over prescription glasses



FRAME: EN166 3 F CE

130 g

| VERSION                                                     | SKU       | LENS MARKING      |
|-------------------------------------------------------------|-----------|-------------------|
| Autoclavable for multiple use-Direct Ventilation-Small      | ELATPRS   | 2C-1.2 1 BT KN CE |
| Autoclavable for multiple use-Direct & Indirect Ventilation | ELATPR    | 2C-1.2 1 BT KN CE |
| Autoclavable for multiple use-Direct Ventilation            | ELATPR2   | 2C-1.2 1 BT KN CE |
| Accessory -Elite Cover                                      | ELITEC00E |                   |

## VERSATILITY

### COVERALL

- + PSGCOV2R01: Sterilized by gamma irradiation in the UK at a specified dose range : 25 -40 KGY
- + Triple layer packaging and 3 years of shelf life
- + Adjustable isoprene strap

| VERSION                       | SKU        | LENS MARKING      |
|-------------------------------|------------|-------------------|
| Sterile for single use        | PSGCOV2R01 | 1 9 BT CE         |
| Non-Sterile for single use    | COVACLEAN  | 2C-1.2 1 BT CE    |
| Autoclavable for multiple use | COVACLAVE  | 2C-1.2 1 FT KN CE |



**COVACLEAN** 94 g  
FRAME: EN166 3 4 BT CE UK



**PSGCOV2R01** 66 g  
FRAME: EN166 3 4 FT CE UK



**COVACLAVE** 77 g  
FRAME: EN166 3 4 9 BT CE

## BEST SELLER

### SUPERBLAST

- + Overflow chute for liquids
- + Upper ventilation / sealed in the lower part
- + Compatible with a half-mask respirator

| VERSION                                                | SKU        | LENS MARKING        |
|--------------------------------------------------------|------------|---------------------|
| Vented TPR Frame - Superior Indirect Ventilation       | SUPBLCLAVE | 2C-1.2 1 9 BT CE    |
| Ultra-vented TPR Frame - Superior Indirect Ventilation | SUPBLCLAV2 | 2C-1.2 1 9 BT CE    |
| TPV Frame - Superior Direct Ventilation                | SUPBLCLAV3 | 2C-1.2 1 9 BT KN CE |



**SUPBLCLAVE** 94 g  
FRAME: EN166 3 4 BT CE UK



**SUPBLCLAV2** 77 g  
FRAME: EN166 BT CE UK



**SUPBLCLAV3** 66 g  
FRAME: EN166 BT CE UK

WITH HALF OF THE POPULATION REQUIRING VISION CORRECTION,  
**PRESCRIPTION SAFETY GLASSES ARE A MUST**  
 TO ENSURE EMPLOYEES' WELLBEING.



# VISUAL EXCELLENCE



## SIMPLE AND AGILE TURNKEY SOLUTION

- + FLUID AND AUTOMATIZED PROCESS
- + INTUITIVE AND USER-FRIENDLY WEBSHOP (NEW)

## QUALITY PRODUCTS & SERVICES

- + EN166 CERTIFIED PRESCRIPTION EYEWEAR
- + SHORT LEAD TIMES (AVERAGE 14 DAYS)
- + DEDICATED TEAM OF EXPERTS






Thanks to our various lens designs and wide power range we can correct the vision of 98% of people through single vision, bifocal, degressive and progressive lenses.

## DISCOVER OUR FULL RANGE

[bolle-safety.com/prescription.html](http://bolle-safety.com/prescription.html)



METAL, POLYCARBONATE,  
ACETATE OR SUSTAINABLE  
BIO-BASED FRAMES

CURVE RANGING  
FROM 4 TO 8



**RANGE OF CORRECTION :**  
+7.5/-7.5 with extra power up to +10/-10

### AVAILABLE SHADES:



CLEAR



**MODULATOR**  
(Photochromic)



QUARTZ



SMOKE

### OPTIONAL TECHNOLOGIES:

PRO3LU

PLATINUM

bZEN

# CUSTOMIZE YOUR PROTECTIVE EYEWEAR

 PERSONALIZE YOUR GLASSES WITH YOUR COMPANY NAME OR LOGO WHILE ENJOYING BOLLÉ SAFETY'S EXPERTISE AND QUALITY.




*Why hesitate  
any longer?*

CLICK TO  
START NOW

## 01 | CUSTOMIZATION

LEVEL OF CUSTOMIZATION




## 02 | SPECIAL MAKE-UP

LEVEL OF CUSTOMIZATION




## 03 | SPECIAL PROJECTS

LEVEL OF CUSTOMIZATION



**ProBLU**  
BLUE LIGHT FILTERING TECHNOLOGY

# THE PERFECT BALANCE BETWEEN CLARITY & BLUE LIGHT FILTRATION

Our ProBlu embedded lens technology allows for the dispersed pigments to block 100% of the harmful blue light up to 420 nm.

## MAN OSLO



FRAME:

26 g

- + Hybrid metal and acetate frame
- + Polycarbonate lens for resistance & optical clarity
- + Embedded ProBlu technology + Anti-reflective coating

| VERSION                             | SKU        | LENS MARKING |
|-------------------------------------|------------|--------------|
| Matt Black and translucent Tortoise | PRBOSLO100 | PrB          |
| Matt Black and translucent Grey     | PRBOSLO108 | PrB          |

## UNISEX FRAME WELLINGTON



FRAME:

30 g

- + Premium acetate frame
- + Polycarbonate lens for resistance & optical clarity
- + Embedded ProBlu technology + Anti-reflective coating

| VERSION          | SKU        | LENS MARKING |
|------------------|------------|--------------|
| Shiny Black      | PRBWELL108 | PrB          |
| Shiny Black +1   | PRBWELL10A | PrB          |
| Shiny Black +1.5 | PRBWELL10B | PrB          |
| Shiny Black +2   | PRBWELL10C | PrB          |
| Shiny Black +2.5 | PRBWELL10D | PrB          |
| Shiny Black +3   | PRBWELL10E | PrB          |

## WOMAN BARCELONA



FRAME:

25 g

- + Hybrid metal and acetate frame
- + Polycarbonate lens for resistance & optical clarity
- + Embedded ProBlu technology + Anti-reflective coating

| VERSION                     | SKU        | LENS MARKING |
|-----------------------------|------------|--------------|
| Shiny Black and Gold        | PRBBARC108 | PrB          |
| Black and Crystal with Gold | PRBBARC204 | PrB          |
| Crystal                     | PRBBARC200 | PrB          |

## SAFETY HARPER



FRAME: EN166 F

19 g

- + Embedded ProBlu technology
- + Polycarbonate lens for resistance & optical clarity
- + Compliant to EN166 safety standard

| VERSION   | SKU        | LENS MARKING |
|-----------|------------|--------------|
| Grey-Blue | PXFHARP208 | PrB          |



# b.line

## SIMPLICITY & EFFICIENCY

B-LINE is a range of safety eyewear accessible to all and is adapted to the most common industrial risks.

### GLASSES

#### BL100



21 g

FRAME: EN166 FT CE UK CA

- + Lightweight with a universal design
- + Ultra wrap-around frame for added protection
- + Anti-Scratch coating

| VERSION | SKU       | LENS MARKING       |
|---------|-----------|--------------------|
| Clear   | BL100N10W | 2C-1.2  1 FT CE AS |
| Smoke   | BL100N20W | 5-2.5  1 FT CE AS  |

### GLASSES

#### BL130



32 g

FRAME: EN166 FT CE UK CA

- + Adjustable temples
- + Upper and side protection
- + Anti-Scratch coating

| VERSION | SKU       | LENS MARKING       |
|---------|-----------|--------------------|
| Clear   | BL130N10W | 2C-1.2  1 FT CE AS |
| Smoke   | BL130N20W | 5-2.5  1 FT CE AS  |

### OVER THE GLASSES

#### BL110



32 g

FRAME: EN166 FT CE UK CA

- + Upper, lower, side protection
- + Wide temples for extra protection
- + Anti-Scratch coating

| VERSION | SKU       | LENS MARKING       |
|---------|-----------|--------------------|
| Clear   | BL110N10W | 2C-1.2  1 FT CE AS |
| Smoke   | BL110N20W | 5-2.5  1 FT CE AS  |

### GOGGLES

#### BL150



76 g

FRAME: EN166 3 B CE UK CA

- + Flexible PVC Frame
- + Available in two versions
- + Tresse fine réglable

| VERSION       | SKU       | LENS MARKING      |
|---------------|-----------|-------------------|
| Clear -Vented | BL150N10W | 1 B CE AS         |
| Clear -Sealed | BL150N11W | 2C-1.2  1 B CE AB |

# B-CLEAN & ACCESSORIES



## ANTI-FOG B300



**DISPLAY READY  
PACKAGING**



58 g

- ✚ Up to 72 hours of effectiveness
- ✚ For all types of lenses
- ✚ Up to 400 sprays

| VERSION    | SKU                                                                                         | SIZE                  |
|------------|---------------------------------------------------------------------------------------------|-----------------------|
| Spray 30mL |  PACFAR3 | H: 11 x L: 4 x P: 3.5 |

## ACCESSORY CORD



6 g

| VERSION         | SKU                                                                                       | SIZE   |
|-----------------|-------------------------------------------------------------------------------------------|--------|
| Adjustable cord |  CORDC | 560 mm |

## ACCESSORY CASE



6 g

| VERSION     | SKU                                                                                       | SIZE   |
|-------------|-------------------------------------------------------------------------------------------|--------|
| Banana case |  ETUIB | 560 mm |

## CLEANING B100/B500/B600



290/1300/1565 g

- ✚ Pre-impregnated cleaning wipes
- ✚ Water-based formula
- ✚ Alcohol and silicone free

| VERSION            | SKU                                                                                           | SIZE                      |
|--------------------|-----------------------------------------------------------------------------------------------|---------------------------|
| 100 cleaning wipes |  PACW100 | H: 20.5 x L: 12.5 x P: 6  |
| 500 cleaning wipes |  PACW500 | H: 22 x L: 27.5 x P: 10.5 |
| Distributeur mural |  PACD500 | H: 7.5 x L: 45 x P: 34.5  |

## SUPPORT STRAP



10 g

| VERSION          | SKU                                                                                              | SIZE   |
|------------------|--------------------------------------------------------------------------------------------------|--------|
| Universal strap* |  PSPUNISS01 | 630 mm |

\*Only suitable for the following models:  
Komet, Mercurio, Ness, Ness+ (& Small), Rush+ (& Small),  
Silex, Silex+ (& Small), Tryon (& RX), Ultim8

# MARKINGS AND STANDARDS

BOLLÉ SAFETY EYEWEAR BEARS LENS AND FRAME MARKINGS THAT ARE SPECIFIC TO EACH PRODUCT. EVERY MARKING IS RELATED TO A PARTICULAR USE AND PROVIDES INFORMATION THAT IS CERTIFIED AND TESTED BY INDEPENDENT LABORATORIES, THUS GUARANTEEING THE QUALITY AND RESISTANCE OF YOUR PROTECTIVE EYEWEAR.



MANUFACTURER  
LOGO

2C-1.2  1 9 BT KN CE

CODE  
(FIELD  
OF USE)

BOLLÉ  
SAFETY

EUROPEAN  
STANDARD

MECHANICAL  
STRENGTH

PROTECTION  
CLASS

OPTICAL  
CLASS



*For more  
information about  
a specific product,  
please refer to the  
product's markings.*


## EN166

Guarantee of minimum protection against common risks (dropping, sun-ageing, heat exposure, corrosion, etc.).

## UK CA

The UKCA (UK Conformity Assessed) marking is a new marking used for goods sold on the market in Great Britain (England, Wales and Scotland). It covers most goods which previously required the CE marking.

**DISCOVER  
VIDEOS OF OUR  
PRODUCTS  
TESTED BY AN  
INDEPENDANT LAB.**







The guarantee of Bollé Safety product authenticity and quality.

## LENS MARKING

| SYMBOL | DEFINITION                                                                                         | DISPONIBLE IN             |         |             | NORMA | SUBJECT         |
|--------|----------------------------------------------------------------------------------------------------|---------------------------|---------|-------------|-------|-----------------|
|        |                                                                                                    | Glasses/ Over the glasses | Goggles | Faceshields |       |                 |
| 1      | Continuous work - Worn permanently                                                                 |                           |         |             | EN166 | Optic class     |
| 2      | Non-continuous work - Worn intermittently                                                          |                           |         |             | EN166 | Optic class     |
| 8      | Electrical short circuit arc                                                                       |                           |         |             | EN166 | Electric risk   |
| 9      | Molten metal and hot solids                                                                        |                           |         |             | EN166 | Thermal risk    |
| S      | Extra strong: resists a 22mm 43g ball falling 1.3m at 5.1 m/s                                      |                           |         |             | EN166 | Mechanical risk |
| F      | Low energy impact, resists a 6mm, 0.86g ball at 45m/s                                              |                           |         |             | EN166 | Mechanical risk |
| B      | Medium energy impact, resists a 6mm, 0.86g ball at 120 m/s                                         |                           |         |             | EN166 | Mechanical risk |
| A      | High energy impact, resists a 6mm, 0.86g ball at 190 m/s                                           |                           |         |             | EN166 | Mechanical risk |
| T      | Authorised use in an environment in which high speed particles at extreme temperatures are present |                           |         |             | EN166 | Mechanical risk |
| K      | Resistance to surface damage by fine particles                                                     |                           |         |             | EN166 | Abrasion        |
| N      | Resistance to fogging                                                                              |                           |         |             | EN166 | Fogging         |

## MARQUAGE DE LA MONTURE

| SYMBOL | DEFINITION                                                                                         | DISPONIBLE IN             |         |             | NORMA | SUBJECT         |
|--------|----------------------------------------------------------------------------------------------------|---------------------------|---------|-------------|-------|-----------------|
|        |                                                                                                    | Glasses/ Over the glasses | Goggles | Faceshields |       |                 |
| 3      | Liquid droplets or splashes                                                                        |                           |         |             | EN166 | Chemical risk   |
| 4      | Large dust particles >5 microns                                                                    |                           |         |             | EN166 | Chemical risk   |
| 5      | Gas and fine dust particles <5 microns                                                             |                           |         |             | EN166 | Chemical risk   |
| 8      | Electrical short circuit arc                                                                       |                           |         |             | EN166 | Electric risk   |
| 9      | Molten metal and hot solids                                                                        |                           |         |             | EN166 | Thermal risk    |
| S      | Extra strong: resists a 22mm 43g ball falling 1.3m at 5.1 m/s                                      |                           |         |             | EN166 | Mechanical risk |
| F      | Low energy impact, resists a 6mm, 0.86g ball at 45m/s                                              |                           |         |             | EN166 | Mechanical risk |
| B      | Medium energy impact, resists a 6mm, 0.86g ball at 120 m/s                                         |                           |         |             | EN166 | Mechanical risk |
| A      | High energy impact, resists a 6mm, 0.86g ball at 190 m/s                                           |                           |         |             | EN166 | Mechanical risk |
| T      | Authorised use in an environment in which high speed particles at extreme temperatures are present |                           |         |             | EN166 | Mechanical risk |

### WARNING

- F. Maximum protection for spectacles.
- B. Maximum protection for goggles.
- A. Maximum protection for face shields.

If the S, F, B, A and T symbols do not apply to both the lens and frame, then the lowest level must be assigned to the complete protective eyewear.

## BALTIC STATES/ BOLLÉ SAFETY

SIA "Guru Distribution" Mednieku Street  
21/23, Ogre, LV-5001  
Tel. +371 26253838  
Tel. +371 27667122  
E-mail: [andis.valgacs@gurudistribution.eu](mailto:andis.valgacs@gurudistribution.eu)



**SEE ALL  
YOU CAN DO**

[gurudistribution.eu](http://gurudistribution.eu)